

530, 960
10/530960

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 December 2004 (16.12.2004)

PCT

(10) International Publication Number
WO 2004/108552 A1

(51) International Patent Classification⁷: **B65D 71/00,**
B60P 7/08

(21) International Application Number:
PCT/GB2004/002166

(22) International Filing Date: 20 May 2004 (20.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0312791.7 4 June 2003 (04.06.2003) GB
0322549.7 26 September 2003 (26.09.2003) GB

(71) Applicant (for all designated States except US): **LOAD-
HOG LIMITED** [GB/GB]; The old West Gun Works, Sav-
ille Street East, Sheffield S4 7UQ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FACEY, Hugh,**


David [GB/GB]; Clifford House, Ecclesall Road South,
Whirlow, Sheffield S11 0PX (GB). **SHAWCROSS,**
Brian, Edward [GB/GB]; 14 Rose Avenue, Retford,
Nottinghamshire DN22 7HR (GB). **BOALER, Derek**
[GB/GB]; 88 Henley Avenue, Norton, Sheffield S8 8JJ
(GB). **MAKIN, John** [GB/GB]; 18 St. Peters Close,
Brinsworth, Rotherham, South Yorkshire S60 5NJ (GB).
GIEMZA, Lee, Mark [GB/GB]; 23 Church View, Crig-
glestone, Wakefield WF4 3PF (GB).

(74) Agents: **HULSE, Thomas, Arnold et al.**; Hulse & Co., St
James House, Vicar Lane, Sheffield S1 2EX (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,

[Continued on next page]

(54) Title: A CAP FOR PALLETISED LOADS

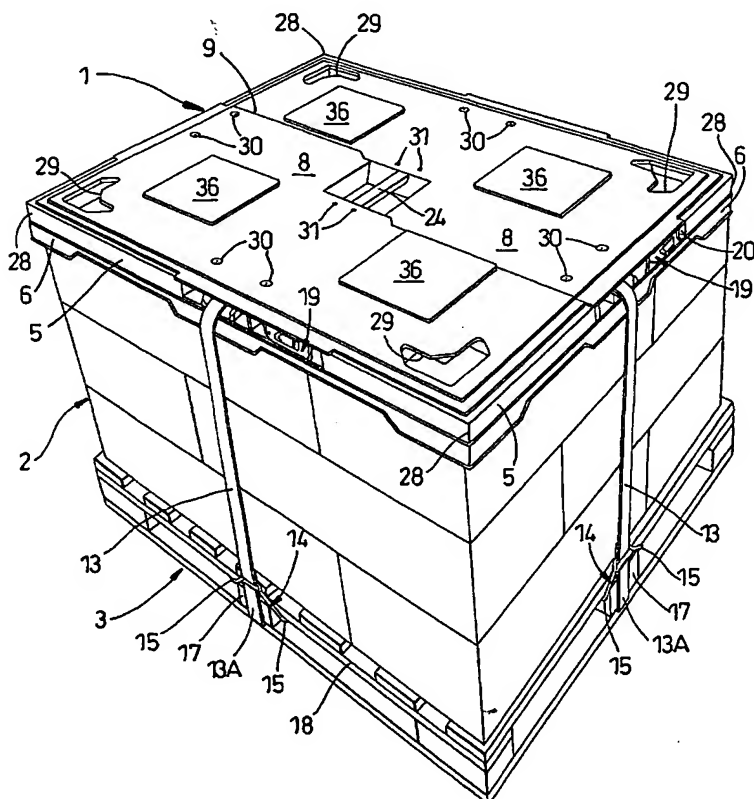

(57) Abstract: A cap for use on a palletized load has a main moulding (4) providing housings (11) at a pair or two pairs of opposite sides (5) for a cassette (12) in which a strap (13) passes through a slotted crossbar (37) between a drum (79) and a hook (14) having two prongs (15) for engaging the underside of the platform of a pallet (e.g. at each side of a middle spacer), the strap then being tensioned by a linkage (39) between the slotted crossbar (37) and a lever (19) within a slot (91) for swinging between an inoperative position (A) and an operative position (B) (e.g. up to 90° thereto) to rotate the crossbar (37) to wind the strap (13) thereon.

WO 2004/108552 A1